



Living Water



Use and Care Instructions

LIMITED ONE YEAR WARRANTY

At the time of purchase, it is the owner's responsibility to complete the warranty information and submit to EcoQuest International, to keep proof of purchase of the unit and all replacement cartridge(s) and to demonstrate that proper cartridge replacement and filter maintenance was performed as specified in the owner's instructions. The provisions of this warranty shall not apply to any product that has been subjected to misuse, neglect, over-tightening, lack of, or improper periodic filter replacement, repaired or altered by anyone other than an EcoQuest Authorized Service Center, and will VOID the warranty in it's entirety. Transportation charges on units submitted for repair or replacement under warranty to EcoQuest International, 310 Elmer Cox Drive, Greeneville, TN 37743 shall be paid by the registered owner. This is the exclusive remedy and liability for consequential damages. There are no other warranties, either expressed or implied, limited to the extent permitted by law.

This Warranty gives you specific legal rights, and you may also have other rights which vary from state to state. If your unit is defective, please contact EcoQuest International, 310 T. Elmer Cox Drive, Greeneville, TN 37743, [www.ECOQUEST.com](http://www.ECOQUEST.com) or 1.800.989.2299.



Thank you for choosing the Living Water Showerhead by EcoQuest.

Your Handheld Showerhead features a replaceable cartridge with patented Chlorgon® non-carbon media that removes more chlorine from shower water, at a wider temperature range, than any other. Replaceable, reversible filter cartridge, item # US40018, available through your EcoQuest Business Owner, is rated for three months or 3,000 gallons.



FEATURES:

- Hose mount shower handle with built-in filter
- 72" reinforced hose
- High-strength hose bracket
- Patented chlorgon filtration media removes more chlorine at a wider temperature range
- Replaceable reversible filter cartridge  
Item # US40018

REMOVES:

- 75% of free chlorine at 3,000 gallons (3 months)
- Combined chlorine (sodium hypochlorite)
- Hydrogen sulfide (odors)

EcoQuest International  
310 T. Elmer Cox Drive  
Greeneville, TN 37743  
1.800.989.2299  
[www.EcoQuest.com](http://www.EcoQuest.com)



# All-In-One Handheld Showerhead, Premium Handheld Showerhead

## INSTALLATION

1. Remove existing shower head from shower arm.
2. Screw hose-bracket onto shower arm.
3. Remove the paper seal from end of handle.
4. Insert (2) rubber washers into couplers at each end of hose.
5. Attach one end of hose to bracket and the other to handle.
6. Place handle into bracket.

## OPERATION

BEFORE ENTERING THE SHOWER.

1. Activate filter by turning the shower-water to “full-hot”.
2. Cool to the desired temperature before entering shower.  
Replace filter cartridge every 3 months or 3,000 gallons, whichever comes first, with **Item # US40018**.

## MAINTENANCE

Back-flush monthly or as needed by REVERSING the direction of the cartridge in the handle.

## FILTER CARTRIDGE REPLACEMENT


The filter cartridge should be replaced every 3 months or sooner (depending on individual water conditions).

1. Remove cartridge by unscrewing handle.
2. Remove paper seals from each end and lubricate o-rings with a small amount of Petroleum Jelly (Vaseline).
3. Insert cartridge into handle and screw onto showerhead.

## REMINDER DECAL

is designed to remind you to change the filter cartridge every 3 months.

1. Use a pen to fill out the installation and replacement date.
2. Peel sticker off of backing and apply to a corner of a dry mirror (or any glass surface)

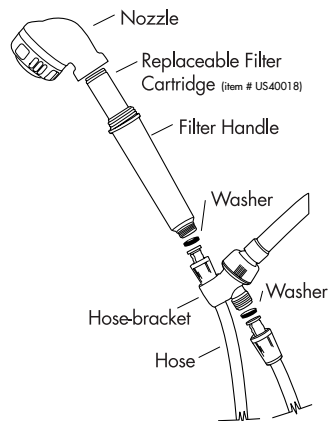

## WARRANTY REGISTRATION

Register your Living Water Handheld Showerhead on-line at [www.ecoquest.com/productregistration](http://www.ecoquest.com/productregistration) or fill out and return the enclosed warranty registration card.

## Performance Data:

**All-In-One Handheld Showerhead,  
Premium Handheld Showerhead**

Rated Service Flow:

9.5 liters per minute / 2.5 gallons per minute

Rated Service Life at 75% free chlorine removal:

111,385 liters / 3,000 Gallons

Maximum working pressure:

860 kilo pascals / 125 pounds per square inch

Maximum operating temperature:

49° Celsius / 120° Fahrenheit

Installation:

Attaches to shower-arm. No Tools required.

Notes:

- This system is not intended to be used as a drinking water treatment unit.
- Both the system and installation must comply with applicable state and local regulations.